


# RotaCut®

The RotaCut® macerator with integrated heavy material separator –  
for reliable processes and reduced costs

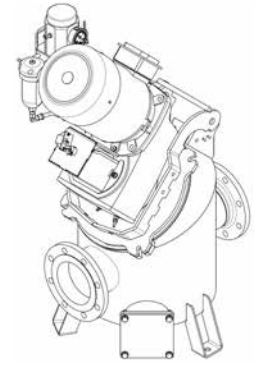

Type	Max. throughput	Optional speed	Optional drive power	Required oil pressure	Required oil quantity	Heavy material separator / available design	Cutting screen with available free passage
	m <sup>3</sup> /h	min <sup>-1</sup>	kW	bar	l/min		mm
<b>Electric driven</b>							
RCQ-20G	90	87 – 320	1.1 – 2.2			Inline	10/15/20
RC 3000	180	76 – 326	1.5 – 4.0			Inline	4/8/10/12/15/20/28
RCQ-26G	180	72 – 326	2.2 – 5.5			Inline	4/8/10/12/15/20/28
RC 5000	300	76 – 330	1.5 – 5.5			Inline	4/6/8/10/12/15/24/30
RC 5000pro	300	66 – 330	1.5 – 7.5			Inline, Compact XL	4/6/8/10/12/15/24/30
RCQ-33G	300	72 – 326	2.2 – 5.5			Inline	4/6/8/10/12/15/24/30
RCQ-33Gpro	300	115 – 292	5.5 – 7.5			Inline, Compact XL	4/6/8/10/12/15/24/30
RC 10000pro	600	66 – 319	2.2 – 7.5			Inline, Compact XL	4/8/10/12/16/20/25/34/38
RCQ-43Gpro	600	115 – 292	5.5 – 7.5			Inline, Compact XL	4/8/10/12/16/20/25/34/38
RCX-48	600	114 – 311	5.5 – 11			RCX, DRS	4/8/10/12/16/20/25/34/38
RCX-58	780	94 – 276	7.5 – 15			RCX, DRS	4/8/10/12/16/25/34/40/50
RCX-68	1,200	98 – 243	11.0 – 18.5			RCX, DRS	30/40/50
<b>Hydraulic drive</b>							
RC 3000	180			50–70	40	Inline, MXL	4/8/10/12/15/20/28
RC 5000	300			60–80	45	Inline, MXL, M/MX	4/6/8/10/12/15/24/30
RC 10000	600			70–100	60	Inline, MXL, M/MX	4/8/10/12/16/20/25/34/38
RCX-58	780			90–125	75	RCX, DRS, MXL	4/8/10/12/16/25/34/40/50